

Version: 01/2023

product description


		XL
bevel	-	4
oak facing thickness	mm	0,6
residential use guarantee	-	20 years
total thickness (tol +/-0,2)	mm	12,1 (10,1 + 2 SilentSystem)
total weight	kg/m ²	10,03
format	mm	2410 x 241
pack content	-	4 planks - 2,3232 m ²
pallet content	-	39 packs - 90,61 m ²
pallet size	m	2,46 x 0,80 x 0,80

tests results

intermediate layer	-	High Density Fiberboard
underlay material	-	BerryAlloc SilentSystem, attached to the reversed side of the board
moisture level	-	7 - 10 %
installation system	-	AluLoc Prime, glue-less locking system
surface treatment	-	Ultimtec high performance varnish
resistance to abrasion	XP B 53-669	+ 15 000 cycles (TT CS10)
gloss level	Dr. Lange, 60° angle	5+/-2 (matt)
compatibility with underfloor heating	-	compatible with electric and waterborne systems
thermal resistance	m ² K/W	0,13
fire resistance	EN 13501-1 (oak)	Cfl-s1
sound reduction	EN ISO 10140-3	18 dB
CE marking	EN 14354	CE
formaldehyde emissions	EN 717-1	E1
VOC emissions	ISO 16000-9	M1
environmental programme	Certification	PEFC/03-31-89



Version: 01/2023

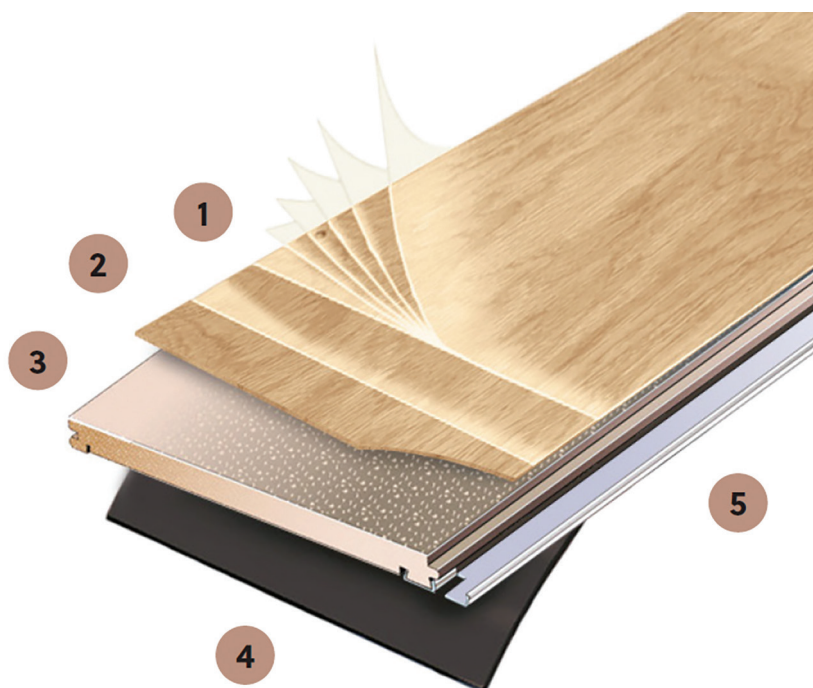

- ❶ Ultimtec®: high performance lacquer
- ❷ 0,6 mm veneer (oak)
- ❸ HDF: moisture resistant core
- ❹ SilentSystem: integrated underlayer
- ❺ AluLoc Prime: aluminium & composite locking system

strong wood floors.

