

Version: 8/01/2021

	innehåll	m ²	vikt
1 paket Pure plankor	8 plankor	2.16 m ²	12.5 kg
1 pall Pure plankor	56 paket	120.96 m ²	700 kg
1 paket Pure plattor	6 plattor	2.25 m ²	12.97 kg
1 pall Pure plattor	28 paket	63 m ²	363 kg





produktspecifikationer

			plankor	plattor
Dimension (l x b)	EN ISO	24346	1326 x 204 mm	612 x 612 mm
Total tjocklek	EN ISO	24346	5 mm	
Slitskikt	EN ISO	24340	0,55 mm	
Totalvikt	EN ISO	23997	5.61 kg/m ²	
Ytbehandling			PUR	
Klassificering	EN ISO	10582	23-33	
Garanti i bostäder			Livstid	
Garanti i offentlig miljö	EN ISO	10874	10 år	

testresultat

Golvvärme	EN ISO	12524	Lämplig för max. 27 °C Elektriska golvvärmesystem med max. 60 W/m ²	
Kontorsstolstest	EN ISO	4918	Godkänd	
Brandklass	EN ISO	13501-1	Bfl-s1	
Kemikaliemotstånd	EN ISO	26987	OK	
Termisk resistens	EN ISO	8302	0,0315 m ² K/W	
Statiskt intryck	EN ISO	24343-1	< 0,10 mm	
Halksäkerhet	DIN	51130	R10	
	EN ISO	13893	Klass DS	
RRL pendeltest: torr	CEN/TS	15676	76	
RRL pendeltest: våt	CEN/TS	15676	50	
Stegljudsdämpning	EN ISO	717-2	10 dB	
Reflekterat stegljud (trumljud)	EN ISO	16205	80 dB	
Ljusåktthet	EN ISO	105-B02	>6	
Dimensionsstabilitet	EN ISO	23999	≤ 0,15 %	
Antistatisk	EN ISO	1815	Ja	
Formaldehyd emission	EN ISO	717-1	E1	
VOC emission			Indoor air comfort GOLD	



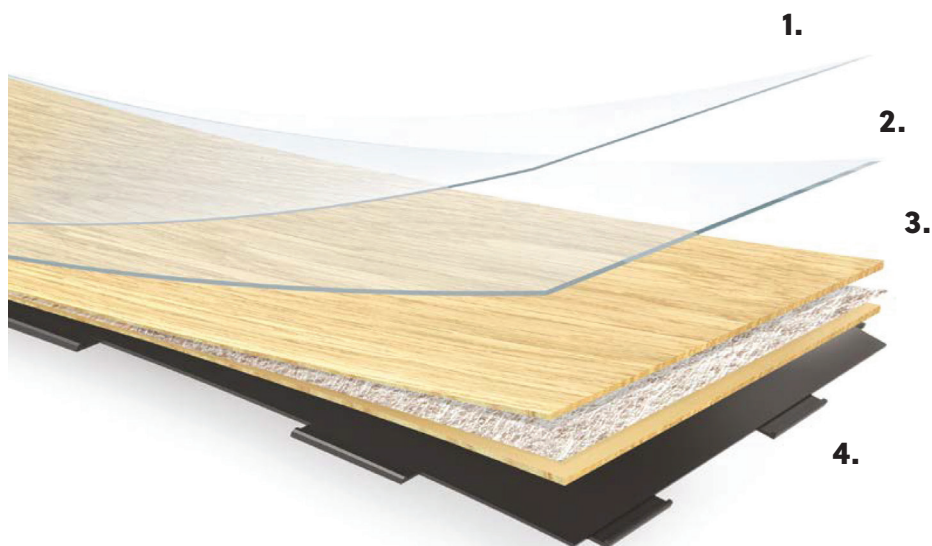

1. Skyddande PU lack
2. Slitskikt 0,55 mm
3. Akustisk dekorvynlskikt (glassfiberförstärkt)
4. Styv kompositkärna (RCB) med DreamClick låselement