


live.

by BerryAlloc

Technical data.



	contains	m ²	ft ²	weight
1 pack Live planks	10 planks	2.705 m ²	29.116 ft ²	13,18 kg
1 pallet Live planks	42 packs	113.61 m ²	122.89 ft ²	580 kg
1 pack Live tiles	10 tiles	1.87 m ²	20.128 ft ²	9,13 kg
1 pallet Live tiles	56 packs	104.72 m ²	1127.20 ft ²	537 kg



product specifications

			planks	tiles
Dimensions	EN ISO	24346	1326 x 204 mm	612 x 306 mm
Total thickness	EN ISO	24346	3.8 mm	
Wear layer	EN ISO	24340	0,30 mm	
Total weight	EN ISO	23997	4,75 kg/m ²	
Surface treatment			PUR	
Usage classification	EN	16511	23/32	
Residential warranty			20 years	
Commercial warranty	EN ISO	10874	5 years	



test results

Underfloor heating	EN ISO	12524	suitable max 27°C (80°F)/ electrical floorheating systems max 60 W/m ²
Fire resistance	EN ISO	13501-1	Bfl-s1
Chemical resistance	EN ISO	26987	OK
Thermal resistance	EN ISO	8302	0.0192 m ² K/W
Residual indentation	EN ISO	24343-1	< 0,10 mm
Slip resistance	DIN	51130	R10
	EN ISO	13893	Class DS
Sound reduction: impact sound	EN ISO	717-2	8 dB
Light fastness	EN ISO	105-B02	> 6
Dimensional stability	EN ISO	23999	≤ 0,15 %
Antistatic	EN ISO	1815	yes
Formaldehyde	EN ISO	717-1	E1
VOC emission			Indoor air comfort GOLD

vinyl planks & tiles.



www.berryalloc.com

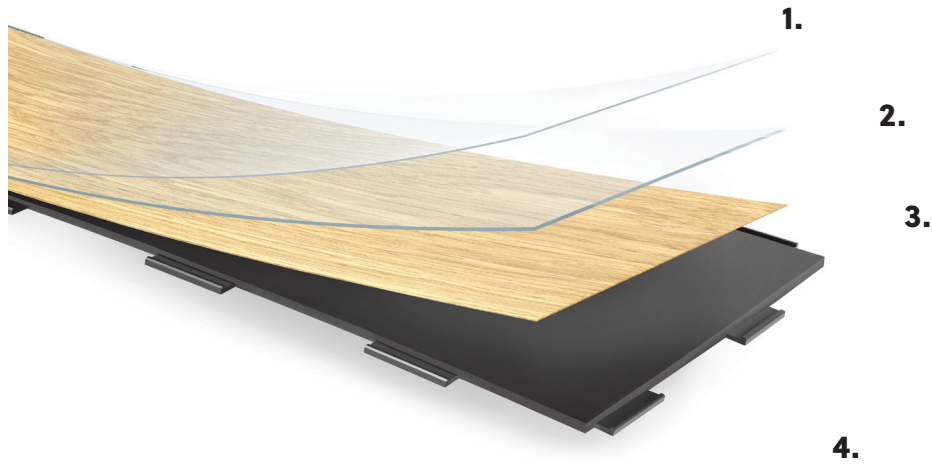

1. Protective PU lacquer
2. Wear layer 0,30 mm
3. Decor layer
4. Rigid Composite Board (RCB)
with DreamClick locking elements