

Ready to be inspired?

Enjoy the simplicity and elegance of mother nature by drawing it inside.

Erase the boundaries between inside and outside.

It doesn't matter if you like traditional, sober, elegant, or cosy designs. You'll find the perfect wall panel in our wide range of natural-looking designs.

Designed to create an atmosphere of warmth and authenticity, our wall panels are made for those busy, chaotic moments of families with little ones. For the kids splashing around and making a mess. For early morning routines and for late night hot showers. For you.

Live life your way. Our walls will blend right in.

relax, it's BerryAlloc

Mal Market

Why choose Walls	(
Wall & Water	10
Collection guide	28
Kitchen Wall	30
Collection guide	40
Installation	44
Accessories Wall & Water	48
Accessories Kitchen Wall	5
Technical overview	52



wall&water.

10

kitchen wall.

36

Why choose Walls?


Nothing beats the feeling of home.

Home is what you make it. That's why our collection of wall panels has a design for all kinds of people and all kinds of lifestyles. Because we've all made life our own.

Choose from an extensive range of natural-looking decors, surprising designs and different tile sizes to give your space a new look and feel.

So if you're on the lookout for a versatile, durable, and easy way to renew your kitchen or bathroom interior...

Look no further.

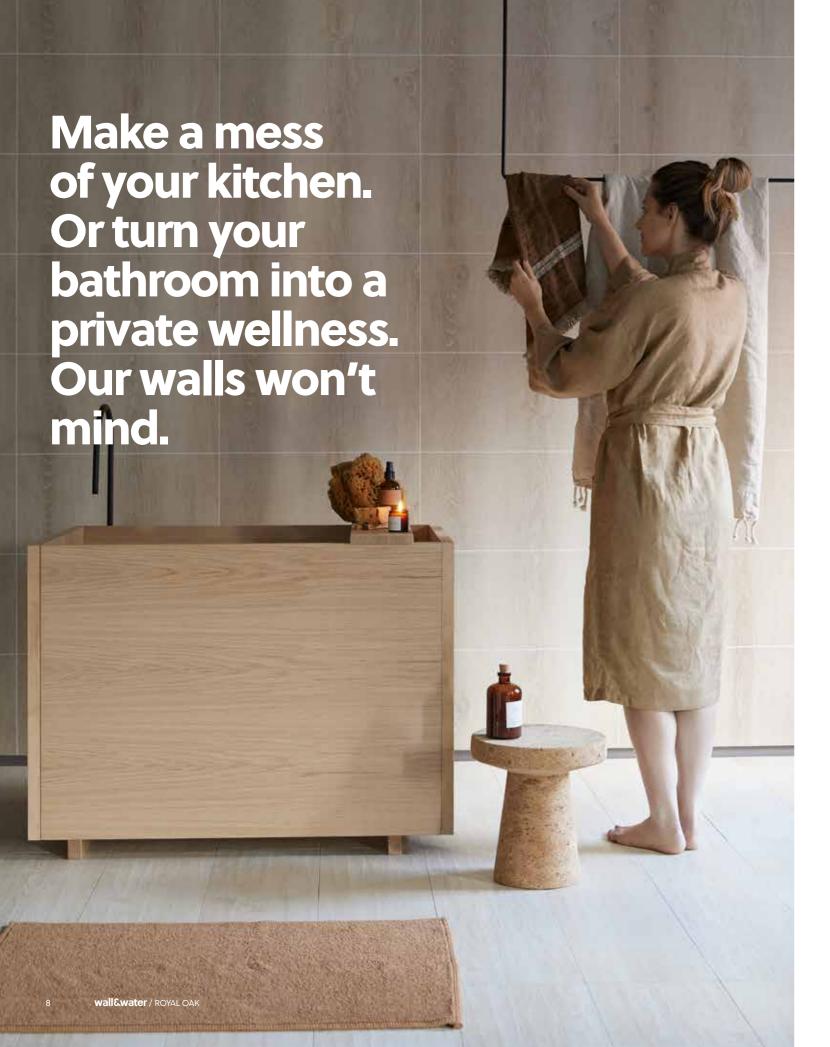

Go for walls and enjoy ...

Lifetime warranty

Just relax, because we promise you a lifetime warranty for every BerryAlloc wall panel in your home.

Easy installation

Glued or interlocking, our wall panels combine ease of installation with ease of maintenance. Whether it's your first time or your daily occupation.

Waterproof

Our Wall & Water panels are waterproof and will look perfect in your bathroom. Splash around all you want. You can even shower directly on the wall.

UV-resistant

Let the sun in and don't worry about discolouring your walls. All our wall panels are UV-resistant. Their design won't change over time.

Environmentally conscious

We take environmental challenges seriously and aim to live up to the demands set for sustainable development. That's why our products are produced, used, recycled, and destroyed without damage to the natural environment.



lifetime warranty



fast & easy



waterproof



UV-resistant



environmentally conscious


Wall & Water.

Our walls fit your interior, your habits, your home.







The choice is yours.
Our collection has a design that you will love.

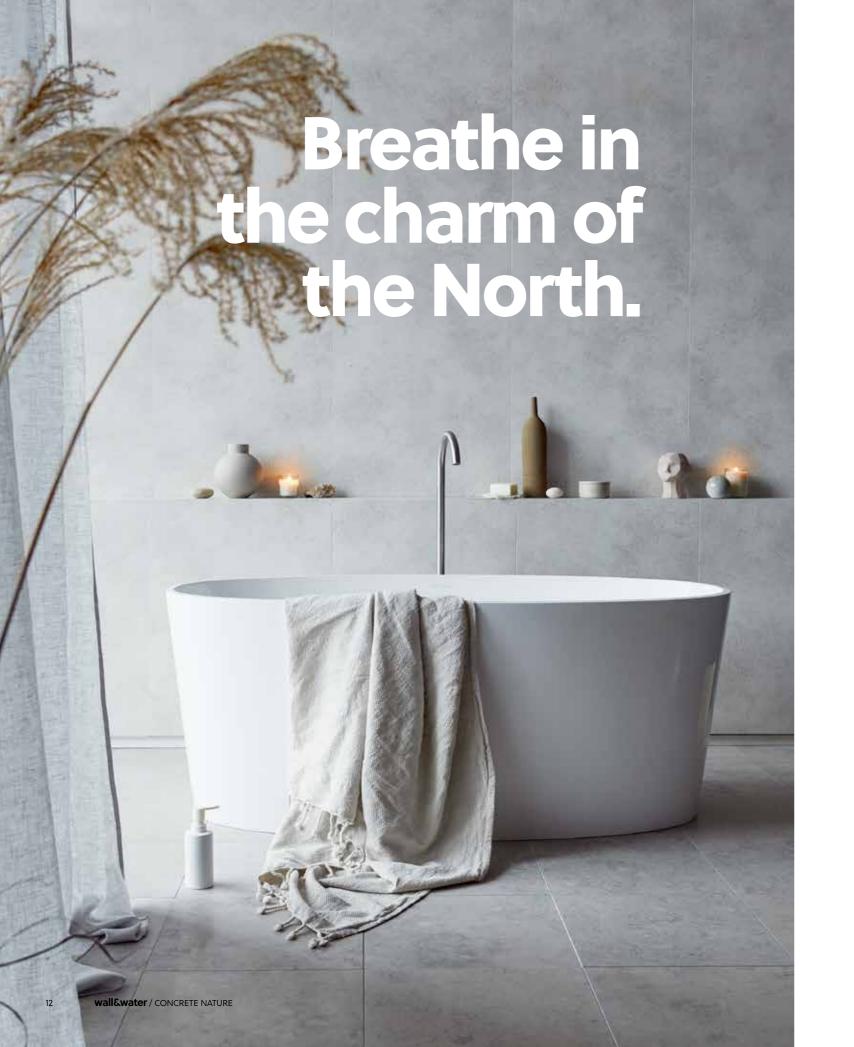




Just relax and create a perfect sense of well-being with Concrete Nature.

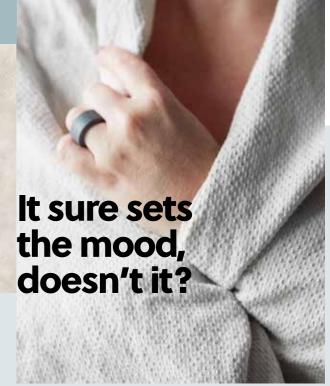

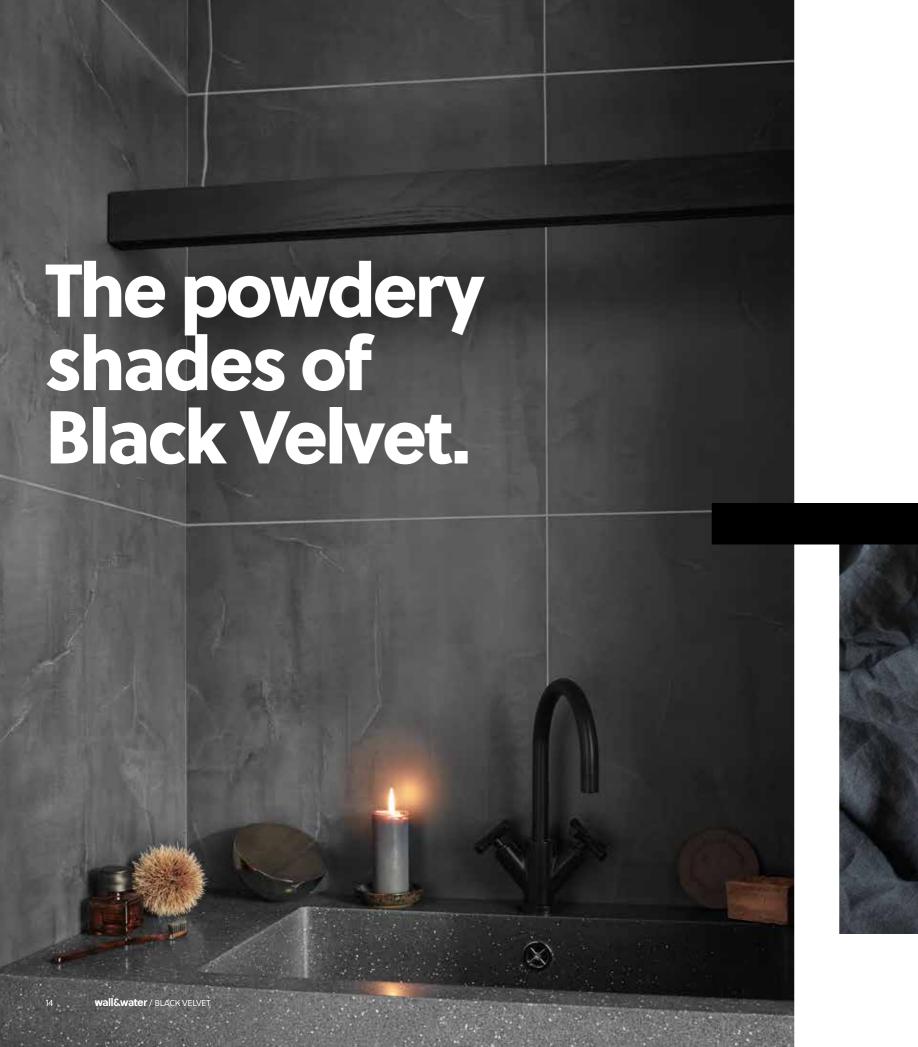




quiet.

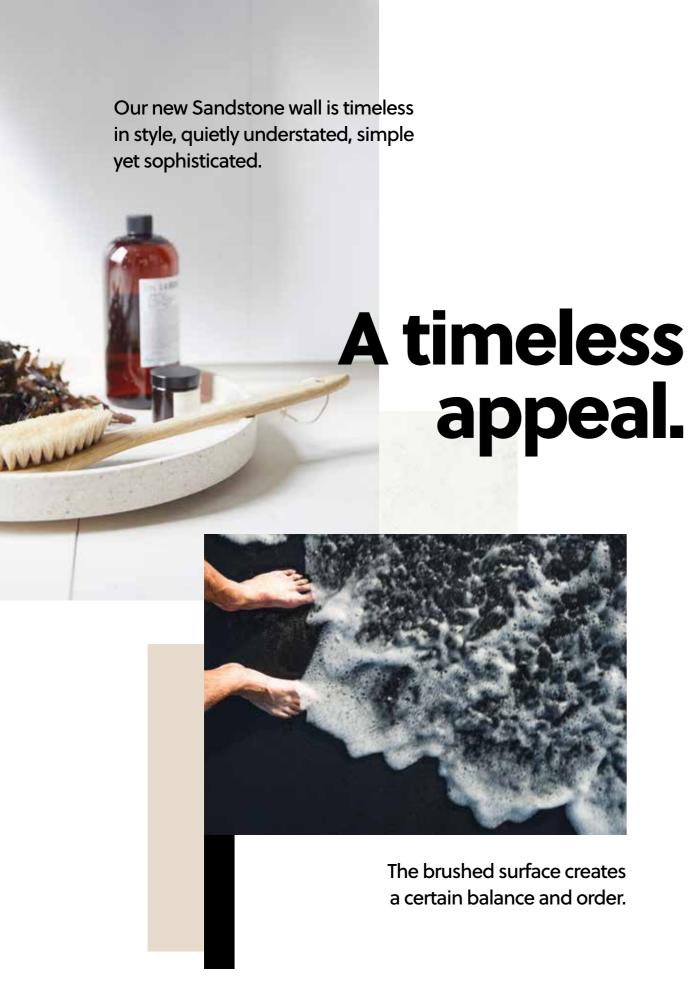



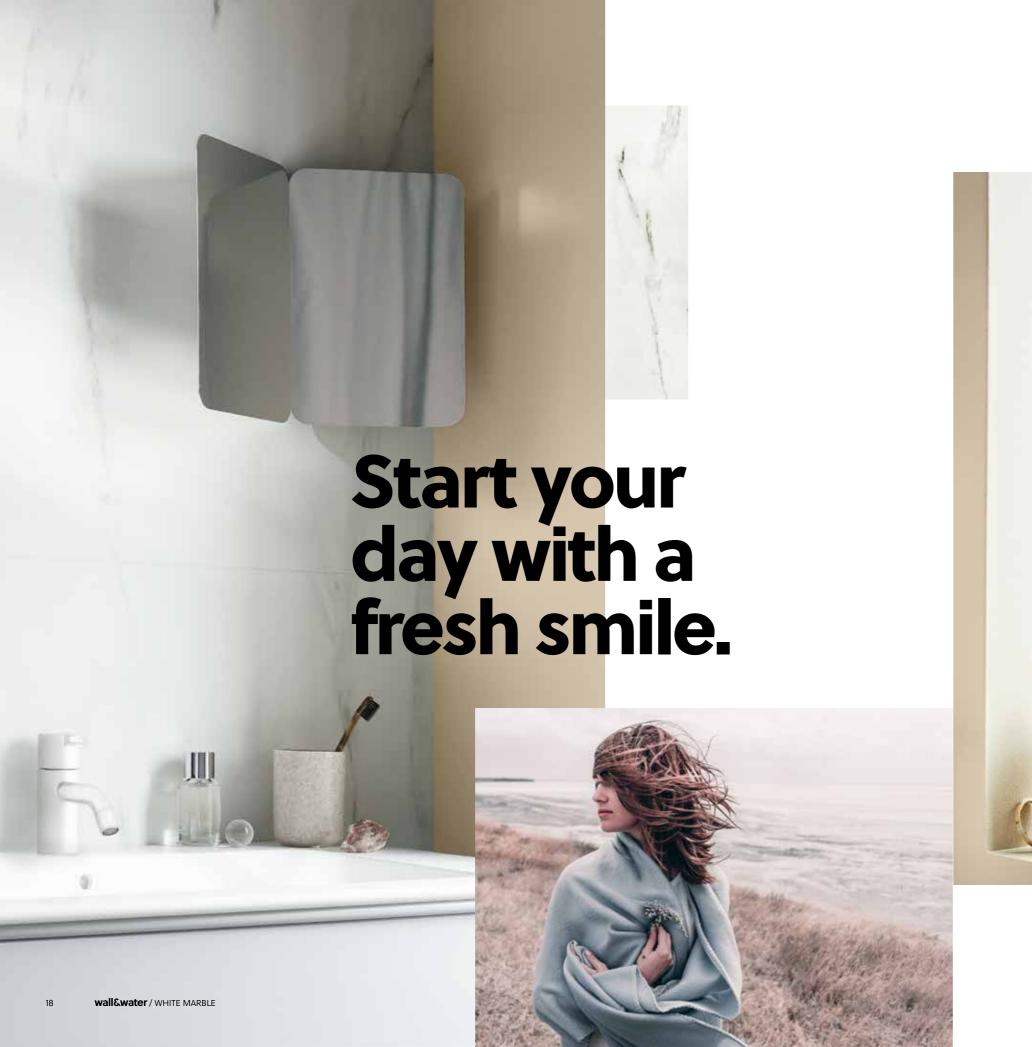



extra softly, which makes it rich in details and keeps it more natural.



Our designs are inspired by nature.







interiors are

monochrome.




It's about the simple things in life.





Collection guide.

There's a design for every kind of lifestyle.



glossy





brushed



satin

Tile size.

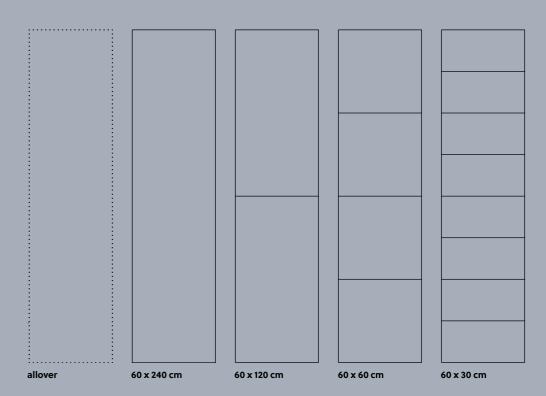

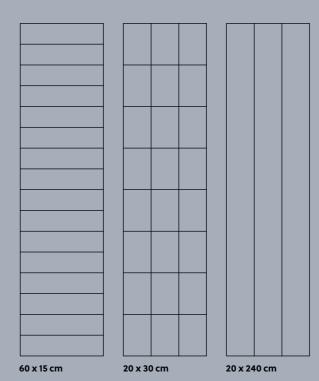

Don't forget: the difference is in the details. Find our wall accessories on p. 48.


panel size: 620 x 2400 x 10,2 mm decor coverage: 600 x 2400 mm groove: light grey

	per pack	per pallet
Quantity	2 panels	20 packs
Gross m ²	2,98 m²	59,52 m²
Net m ²	2,88 m²	57,6 m²
Weight	22,7 kg	467 kg

wall&water / COLLECTION GUIDE

The options are just endless.






Snow White satin tile size: allover 62002180

Snow White satin tile size: 60 x 30 cm 62002177

Snow White satin tile size: 20 x 30 cm 62002181

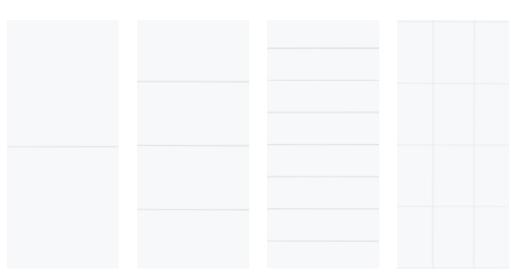

Snow White glossy tile size: 60 x 120 cm 62002182

Snow White glossy tile size: 60 x 30 cm 62002176

Snow White glossy tile size: 60 x 15 cm 62002183

Snow White glossy tile size: 20 x 30 cm 62002184



White Marble glossy tile size: 60 x 240 cm 62001731



White Marble glossy tile size: 60 x 120 cm 62001730



White Marble satin tile size: 60 x 120 cm 62001801

Sandstone

tile size: 60 x 30 cm

brushed

62001726



White Marble satin tile size: 60 x 60 cm 62001800






Sandstone brushed tile size: 60 x 120 cm 62001727



Sandstone brushed tile size: 60 x 60 cm 62001728



Sandstone brushed tile size: 20 x 30 cm 62001729

wall&water/collection guide



Brooklyn Concrete brushed tile size: allover 62001827



Brooklyn Concrete brushed tile size: 60 x 60 cm 62001739



Concrete Nature brushed tile size: 60 x 240 cm 62001735



Concrete Nature brushed tile size: 60 x 30 cm 62001733



Santorini Marble satin tile size: 60 x 30 cm 62001745



Santorini Marble satin tile size: 60 x 240 cm 62001805



Santorini Marble satin tile size: 60 x 60 cm 62001744



Concrete satin tile size: 60 x 60 cm 1960-7967



Concrete satin tile size: 60 x 30 cm 1960-7963



Royal Oak brushed tile size: 60 x 30 cm 62001747



Royal Oak brushed tile size: 20 x 240 cm 62001746


33



Cement brushed tile size: allover 62000448



Cement satin tile size: 60 x 60 cm 62000446



Cement satin tile size: 60 x 30 cm 62000447

wall&water / collection guide



Light Slate glossy tile size: 60 x 120 cm 62001736



Light Slate glossy tile size: 60 x 15 cm 1840-7736



Light Slate satin tile size: 60 x 60 cm 62001737



satin tile size: 60 x 30 cm 1841-7733



Natural Slate brushed tile size: 60 x 120 cm 62002029



Natural Slate brushed tile size: 60 x 60 cm 62002030



Natural Slate glossy tile size: 60 x 240 cm 62001829



Natural Slate glossy tile size: 60 x 30 cm 1840-5923



Black Velvet satin tile size: 60 x 60 cm 62001740



Black Velvet satin tile size: allover 62001826



Stromboli Marble glossy tile size: 60 x 60 cm 62001743




Stromboli Marble brushed tile size: 60 x 120 cm 62001742

35



Federa brushed tile size: allover 62001828



Star Blue glossy tile size: 60 x 60 cm 62001760



Star Blue glossy tile size: 60 x 30 cm 62001759

wall&water / COLLECTION GUIDE wall&water / COLLECTION GUIDE




Our Kitchen Wall collection – made from durable, compact laminate – can withstand heat, water, and even direct splashes of boiling water.





The hardest part? Choosing your design.

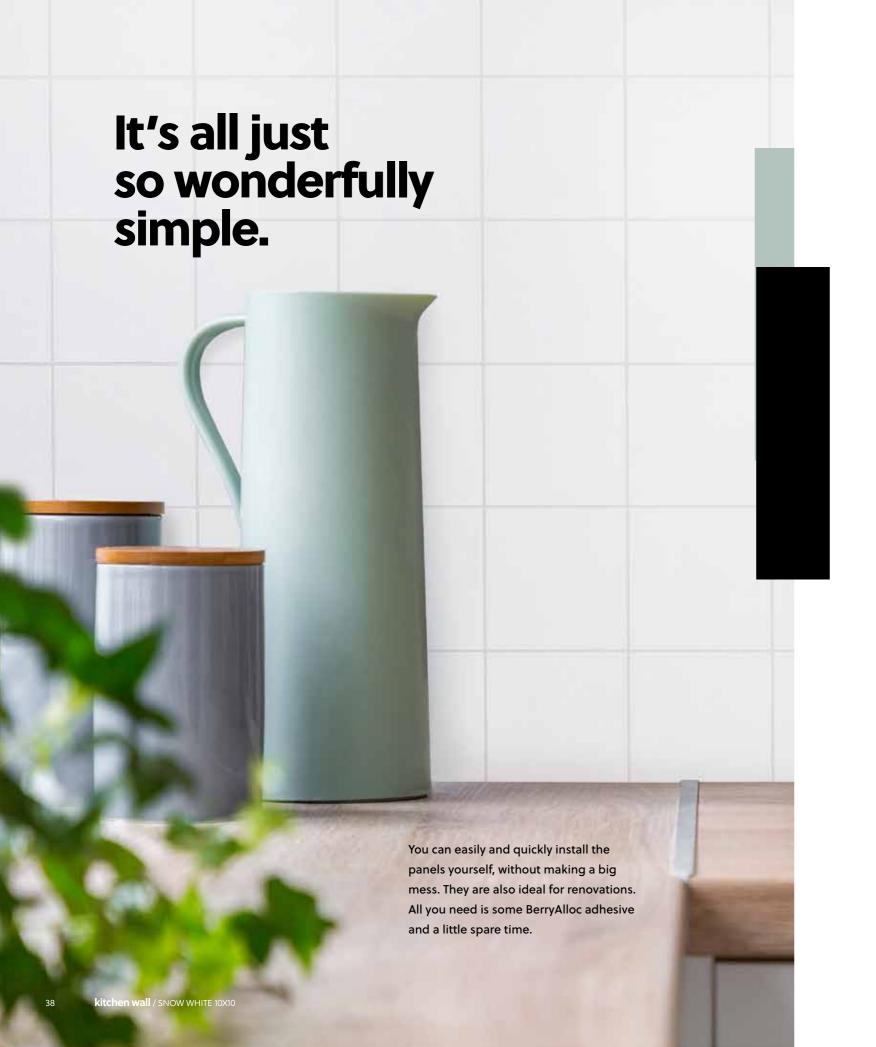


Wondering whether this kitchen wall will suit your interior? Of course it will, because there's a wall for every home.
A cosy cottage, a modern city apartment, or a lively family place: our walls will fit in just perfectly.



40 **kitchen wall** / SANDSTONE HEXAGON

Tile size.

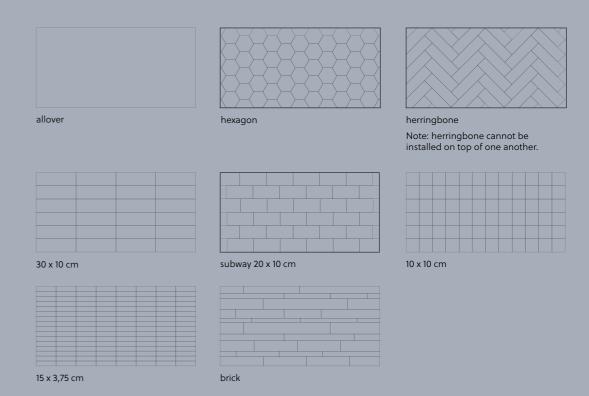

Surface.



panel size: 1200 x 600 x 2,2 mm groove: light grey

	per pack	per pallet	
Quantity	1 panel	40 packs	
Gross m ²	0,72 m²	28,8 m²	
Weight	2,4 kg	102,8 kg	

Don't forget: the difference is in the details. Find our wall accessories on p. 51.

Pick your colour.

Kitchen wall.




Snow White

glossy tile size: allover 62002192




Snow White

glossy tile size: 15 x 3,75 cm 62002193



tile size: 10 x 10 cm 62002194



tile size: 30 x 10 cm 62002195



tile size: subway 20 x 10 cm 62002196



Sandstone

tile size: subway 20 x 10 cm 62001716



Sandstone

tile size: hexagon 62001715



Concrete Nature

tile size: 30 x 10 cm 62001720



Santorini Marble

tile size: allover 62001722

satin



satin tile size: allover



tile size: herringbone 62001713



Light Slate

tile size: 30 x 10 cm 62001807



Light Slate

satin tile size: herringbone 62001714





Natural Slate

tile size: brick 62001806




Natural Slate

tile size: hexagon 62001717



tile size: subway 20 x 10

62001757



Star Blue

glossy tile size: 10 x 10 cm 62001758



Black Velvet

satin tile size: 30 x 10 cm 62001799



Black Velvet

tile size: herringbone

62001756

kitchen wall / COLLECTION GUIDE kitchen wall / COLLECTION GUIDE



Installing your Wall & Water will give you instant satisfaction.

Glued or interlocking, our wall panels combine ease of installation with ease of maintenance. Wall & Water is the only system in the world offering you the look of a tiled wall this quickly and easily – all without the need for grouting.

- 1. Wall & Water panels are best mounted on a wooden frame. The panels interlock thanks to the unique locking system developed at our engineering department in Lyngdal, Norway.

 The result: a smooth wall with no visible joints. Your bathroom will be ready in a splash!
- The panels can also be glued directly onto a solid wall. In this case, the walls must be absolutely straight and smooth.

 For walls with existing coverings of varying thickness (such as tiles halfway up), you can fix wooden boards of the same thickness and use BerryAlloc glue.

More detailed installation instructions can be found on our website or YouTube channel: berryalloc.com & youtube.com/berryalloc.




How to install your Kitchen Wall? Just follow these **steps**.

- Remove the protective foil on the back of the panel and rub the back slightly with a 60-80 grit sandpaper.
- 2. Apply BerryAlloc Adhesive on the existing wall. Make sure to cover the entire area and spread out with a tooth spatula.
- Remember to leave a distance of 2-3 mm between the panel and the kitchen countertop for sealant.
- To make sure that the panel is not sliding, use something to keep the panel up. This can be: Two spikes (levelled)
 Two coins (levelled)
- Remove the protective foil on the front of the panel before you continue with the next panel. That way you'll avoid any visual defects.

More detailed installation instructions can be found on our website or YouTube channel: berryalloc.com & youtube.com/berryalloc.











The difference is in the details.


BerryAlloc Wall & Water panels can be easily installed with our corner profiles.

What finish do you want?

Choose from white or aluminium-coloured profiles. For an extra beautiful and natural look, have a look at our hidden HydroLoc profiles.





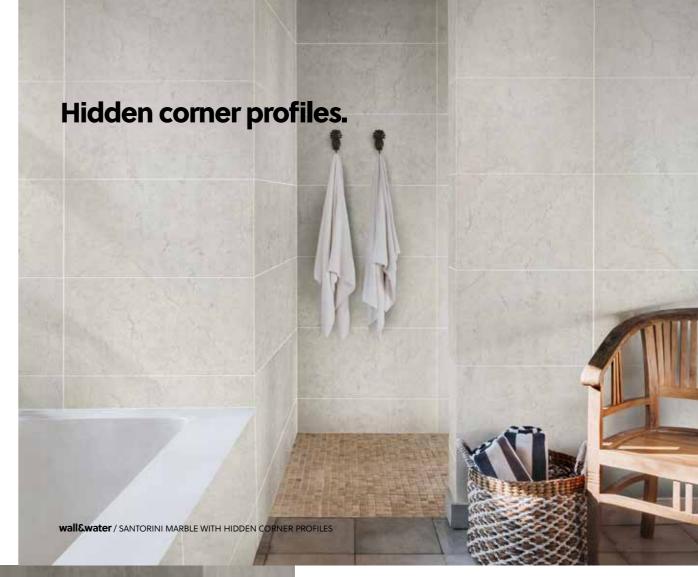



With the unique HydroLoc hidden corner solution you can give your Wall & Water panels a nice corner finish, making the walls looks both natural and exclusive

Using this solution, the profiles would be fastened to the back during installation and will only leave a small visible grout line, similar to those used on the panels themselves.

Wall & Water accessories.

Use our accessories for a smooth and simple installation. The accessories seal the edges of the panels and provides an easy installation. Our accessories are approved for wet zones.

Base profiles

Used to seal the lower end of the panel.



Base profile

alu 2400 mm 9406-3017



Base profile

white 2400 mm 63000038



Corner profiles

Used to seal the corner.

Inner corner profile - QuadraLoc

alu, 90 G 2400 mm 9400-3017 2700 mm 9401-3017



Inner corner profile - QuadraLoc

white, 90 G 2400 mm 63000033 2700 mm 63000034



Inner corner profile - QuadraLoc

alu, 135 G 2400 mm 63000073 2700 mm 63000074



External corner profile

alu, 90 G 2400 mm 63000718 2700 mm 63000720



white, 135 G 2400 mm 63000075 2700 mm 63000076



External corner profile

white, 90 G 2400 mm 63000719 2700 mm 63000037



NB: 2700 mm external corner deviates slightly from the photo

Hidden corner profiles

Hidden inner or external corner profiles give your panels a perfect finish. Only a small visible grout line will be present. Remember the small HydroLoc screws!

HydroLoc hidden external corner profile alu, 2350 mm, 90 G 63000717



HydroLoc hidden inner corner profile alu, 2,350 mm, 90 G


63000716



End profiles

Used to end and seal the wall (horizontally or vertically).















Extension profile

Used to install panels on walls over 2,4 m high.

Extension profile/H-profile alu 2400 mm 63000724



Extension profile/H-profile white 2400 mm

63000723




HydroLoc hidden extension profile

alu 530 mm 63000783



Corner piece

Used to create a cornered box, for a shelf or cistern. Install together with our external corner profiles.



Corner piece 2 per bag alu 63002736



Corner piece 2 per bag white 63002743



Screws for HydroLoc hidden profiles profile 63000725



Screws for panels and profiles 30 mm 9310-0015 45 mm

9310-0016



For installing the cover of the QuadraLoc inner corner profile.

Tapping block 9310-0020



WipesTo clean during installation
9310-0023



Sealant

Sealing between panels and aluminum profiles. Sealing the panel joints in wet areas.

Sealant white 290 ml 63000606





Kitchen Wall Accessories.

Inner corner profile white

600 mm 9453-3017



End profile white

1200 mm 9454-3017



BerryAlloc Adhesive

9310-0027



Inner corner profile alu

600 mm 9450-3017



End profile alu

1200 mm 9451-3017





kitchen wall / ACCESSORIES 51

Wall & Water technical guide.

Product description

2400 x 600 x 10,2 mm (invoiced dimension: 2400 x 620 x 10,2) 1.1 Dimensions 2 panels/pack, décor 2,88 m² and pack 2,98 m² (weight 22,6 kg) 1.2 Packaging

1.3 Composition

- Surface layer

High Pressure Laminate, HPL. Papers are impregnated with melamine and phenol resins.

- Substrate

Spantex - engineered balancing paper with plastic impregnation (PE). - Backing

1.4 Joint sealing To be sealed with BerryAlloc Sealant.

1.5 Installation Glue-free mechanical locking system, installed according to installation instructions.

1.6 Classifications SINTEF technical approval no. 2410.

- Wet-room approved product acc. to BVN (Byggebransjens Våtromsnorm)

European Technical Assessment no. ETA-18/0735.

General requirements

Characteristics		Test standard	Unit	Requirements	Typical values
2.1	Thickness of the element, t	EN 324-1	mm	± 0,4	± 0,4
2.2	Length of the surface layer, I	EN 324-1	mm	± 1,0	± 0,5
2.3	Width of the surface layer, w	EN 324-1	mm	± 0,5	± 0,25
2.4	Squareness of the element, q	Diagonal variance	mm	≤ 1,0	≤ 0,5
2.5	Openings between elements, o	EN 13329	mm	-	< 0,1
2.6	Height difference between elements, h	EN 13329	mm	≤ 0,15	≤ 0,1
2.7	Dimensional variations after changes in relative humidity	EN 318	mm	-	δl _{average} 2,4 δw _{average} 2,6
2.8	Light fastness	EN 20105 EN ISO 105	Grade scale Grade scale	Grey scale: ≥ 4 Blue wool scale: ≥ 6	>4 >6
2.9	Surface hardness	NT Build 059	mm	-	0,42
2.10	Impact resistance	NT Build 066	m	-	1,0
2.11	Resistance to staining	EN 438.2.26	Rating ¹⁾	Group 1 & 2: 5 Group 3 & 4: 4	5 5

Definitions: $\delta l_{average}$ = dimensional changes, $l = \delta w_{average}$ = dimensional changes, w

Other technical data

Cha	aracteristics	Test standard	Unit	Requirements	Typical values
3.1	Formaldehyde, emission	EN 717-2	mg/m² h	-	E1
3.2	Scratch resistance	EN 438.2.25	Rating ¹⁾	-	1
3.3	Reaction to fire	NS 3919	Class	-	K2 (linings) In2 (surface)
		EN 13501-1	Class		D-s2, d0
3.4	Grout line deviation	-	mm	≤ 0,3	< 0,2

¹⁾ Rating scale from 1 to 5, where 5 is the best rating = "no visible change in the surface".

Kitchen Wall technical guide.

Product description

1.1 Dimensions 1200 x 600 x 2,2 mm

1.2 Packaging 1 plate/package = 0,72 m² (weight: 2,4 kg)

Compact high pressure laminate (HPL), with decorative paper on top. 1.3 Composition

Papers impregnated with melamine and phenol resins.

1.4 Edge sealing To be sealed with BerryAlloc Adhesive (MS-polymer adhesive and sealant). 1.5 Installation To be glued to the construction according to the installation instructions.

General requirements

Characteristics		Test standard	Unit	Requirements	Typical values
2.1	Thickness of the element, t	EN 324-1	mm	± 0,2	± 0,1
2.2	Length of the surface layer, I	EN 324-1	mm	± 1,0	± 0,5
2.3	Width of the surface layer, w	EN 324-1	mm	± 1,05	± 0,5
2.4	Squareness of the element, q	Diagonal variance	mm	≤ 0,3	≤ 0,1
2.6	Dimensional variation after changes in the relative humidity	EN 318	mm	-	
2.7	Light fastness	EN 20105 EN ISO 105	Grade scale Grade scale	Grey scale: ≥ 4 Blue wool scale: ≥ 6	>4 >6
2.8	Surface hardness	NT Build 059	mm	-	Not available
2.9	Impact resistance	NT Build 066	m	-	Not available
2.10	Resistance to staining	EN 438.2.26	Rating ¹⁾	Group 1 & 2: 5 Group 3 & 4: 4	5 5

¹⁾ Rating scale from 1 to 5, where 5 is the best rating = "no visible change in the surface".

Other technical data

Characteristics		Test standard	Unit	Requirements	Typical values
3.1	Formaldehyde, emission	EN 717-2	mg/m² h	-	E1
3.2	Scratch resistance	EN 438.2.25	Rating ¹⁾	-	1
3.3	Fire behaviour	EN 13501-1	Class	-	C-s1, d0
3.4	Grout line deviation	-	mm	≤ 0,3	< 0,2


¹⁾ Rating scale from 1 to 5, where 5 is the best rating = "no visible change in the surface".

kitchen wall / TECHNICAL GUIDE wall&water / TECHNICAL GUIDE

¹⁾ Rating scale from 1 to 5, where 5 is the best rating = "no visible change in the surface".

Notes.



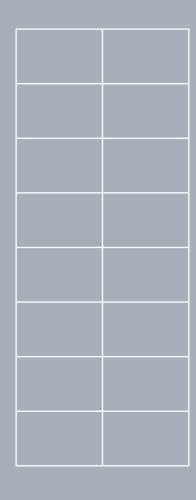





Floors for moments of joy.



Alloc AS

Fiboveien 26 4580 Lyngdal, Norway T +47 38 34 22 00 info@berryalloc.com

berryalloc.com